

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页次	1/14-08-10
		生效日期	2025年8月10日



圆柱磷酸铁锂电芯规格书

Specification for Cylindrical Lithium Iron Phosphate Cell

电芯型号: LFP46150-30Ah 圆柱磷酸铁锂电芯

Cell Type: LFP46150-30Ah Cylindrical Lithium Iron Phosphate Cell

文件编号: BLX.NMDC-3JS-46150-GGS-001

版本版次: A0

初版日期: 2025-8-9

生效日期: 2025-8-10

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	2/14
		生效日期	2025年8月10日



文件发行/修订履历

页次	版次	修订内容	修改人	修改日期
2/14	A0	初版发行	孟凡春	2025-8-10

制 作	审 查	核 准
孟凡春	郑品华	王洪江

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	3/14
		生效日期	2025年8月10日

目录

Content

1. 基本信息 General Information	4
1.1 适用范围 Scope	4
1.2 产品分类 Product Classification	4
1.3 型号名称 Model Name	4
1.4 电芯尺寸 Size	4
1.5 电芯特点 Benefits	4
1.6 主要应用 Main Application	5
1.7 电池组装 Battery Assembly	5
2. 标准规格 Nominal Specification	5
3. 电性能 Electrical Performance	7
4. 安全特性 Safety Characteristics	9
5. 出货与储存 Transportation and Storage	10
6. 操作说明 Operation Instruction	11
7. 安全守则 Precautions and Safety Instructions	12
8. 技术咨询 Consultation	13

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	4/14
		生效日期	2025年8月10日

1. 基本信息 General Information

1.1 适用范围 Scope

本规格书规定了由保力新能源科技股份有限公司生产的圆柱形磷酸铁锂电芯的技术要求，测试方法及注意事项，如需获取本规格书以外的技术要求，请与保力新能源科技股份有限公司联系相关事宜。

This specification describes the technical requirements of Cylindrical lithium iron phosphate cell supplied by Blivex New Energy Technology CO., LTD. If any other technical information is needed, please contact Blivex New Energy Technology CO., LTD.

1.2 产品分类 Product Classification

圆柱磷酸铁锂电芯

Cylindrical lithium iron phosphate cell

1.3 型号名称 Model Name


LFP46150-30Ah 磷酸铁锂电芯

LFP46150-30Ah lithium iron phosphate cell

LFP 46.9 150.2 30Ah
① ② ③ ④

- ① 代表材料类型：LFP——磷酸铁锂材料
- ② 代表圆柱电芯直径：46.9mm
- ③ 代表电芯高度：150.2mm
- ④ 代表容量：30Ah

1.4 电芯尺寸 Size

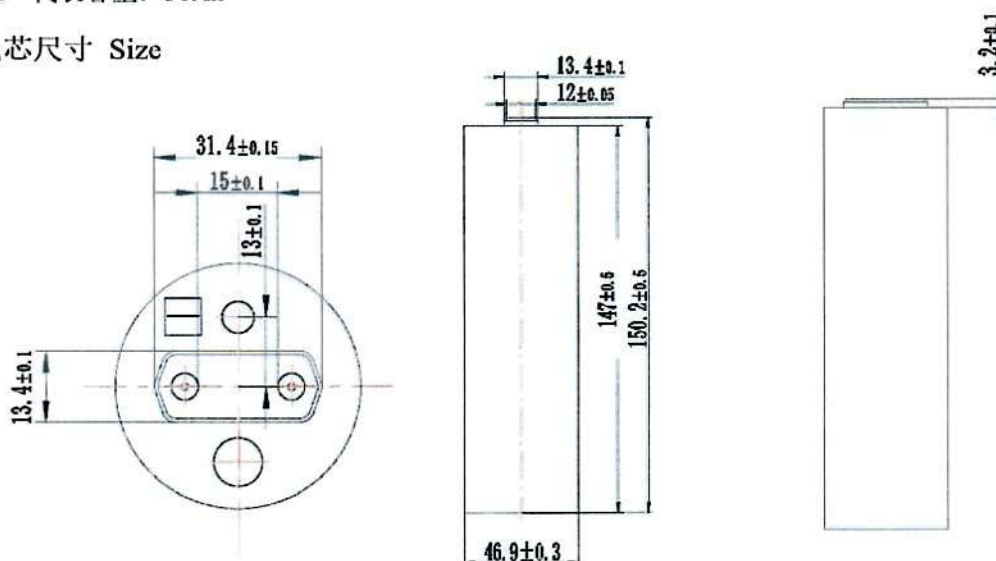

图A 电池图片和外形尺寸

(Figure A) Cell's appearance and dimension

1.5 电芯特点 Benefits

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	5/14
		生效日期	2025年8月10日

- 高能量密度 High energy density
- 低内阻、温升低 Low internal resistance and low temperature rise
- 长循环 Long cycle life performance
- 高安全性 High security
- 产品一致性好 Good consistency

1.6 主要应用 Main Application

动力领域 Power battery field

- 电动两轮车（电动两轮车共享、电动两轮车换电） Electric two-wheel vehicle
- 电动三轮车 Electric tricycle
- 乘用车 Passenger car
- 物流车 Logistics vehicle

储能领域 Energy storage battery field

- 户外电源 Outdoor power supply
- 家庭储能 Home energy storage
- 通信储能 Communication energy storage

1.7 电池组装 Battery Assembly

单个电芯根据具体应用组装成一定规格的电池组，由电池组与电子系统共同参与完成电池组的性能管理、热管理和安全管理。

Individual cells should be integrated in specific battery pack according to customers' demands. The battery pack together with electronic system provides performance, thermal and safety management.

2. 标准规格 Nominal Specification

项目 Item	规格 Specification	条件 Condition
2.1 0.33C容量 0.33C Capacity	$\geq 30.0\text{Ah}$	0.33C discharge@3.65V-2.5V
1C容量 1C Capacity	$\geq 29.5\text{Ah}$	1C discharge@3.65V-2.5V
2.2 交流内阻 AC Impedance	$\leq 2.0\text{m}\Omega$	AC 1kHz@25°C 30%SOC
直流内阻 DC Impedance	$\leq 4.0\text{m}\Omega$	2C discharge 10s@25°C 30%SOC
2.3 标称电压 Nominal Voltage	3.22V	0.33C discharge@3.65V-2.5V
	3.20V	0.5C discharge@3.65V-2.5V
	3.13V	1C discharge@3.65V-2.5V

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	2025-08-10
		生效日期	2025 年 8 月 10 日



2.4 电芯尺寸 Cell Size	电芯直径 Cell Diameter	46.9±0.3mm Max. 47.1mm	包膜 Coated
	电芯总高 Total Height	150.2±0.5mm Max. 150.7mm	含极柱 Pole Contained
	电芯肩高 Shoulder Height	147.0±0.5mm Max. 147.5mm	不含极柱 Pole Not Contained
2.5 电芯重量 Cell Weight		560±20g	包膜 Coated
2.6 能量密度 Energy Density		≥170Wh/kg	
2.7 充电限制电压 Limited Charging Voltage		3.65V	恒流充电 CC Mode
2.8 充电截止电流 Charging Cut-off Current		0.05C (1.5A)	恒压充电 CV Mode
2.9 充电方式 Charging Method	标准充电 Standard Charge	0.5C (15A)	At CC/CV
	快速充电 Quick Charge	1C (30A)	At CC/CV
2.10 放电截止电压 Discharge Cut-off Voltage		2.5V@T>0°C 1.8V@T≤0°C	恒流放电 CC Mode
2.11 标准放电电流 Standard Discharging Current		0.5C (15A)	
2.12 最大持续放电电流 Max continuous discharge current		1C (30A)	
2.13 最大脉冲放电电流 Max Pulse Discharging Current		3C (90A)	30s
2.14 循环性能 Cycling Life		4000 cycles≥80%	25°C 0.5C充/0.5C放@3.65V-2.5V 100% DOD
		2000 cycles≥80%	25°C 0.5C充/1C放@3.65V-2.5V 100% DOD
		1500 cycles≥70%	45°C 0.5C充/0.5C放@3.65V-2.5V 100% DOD
2.15 操作温度范围 Operating Temperature Range	充电温度 Charging Temperature	0~55°C	
	放电温度 Discharging Temperature	-20~60°C	
	储存温度 Storage Temperature	0~45°C@≤3 months 0~25°C@>3 months	
2.16 月自放电率 Monthly Self-Discharge Rate		≤3%/month	

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	7/14
		生效日期	2025年8月10日

2.16 外观 Appearance	二维码清晰,无破裂、划痕、变形、污渍、电解液泄露等 Without break, scratch, distortion, contamination, leakage and so on	受控文件
-----------------------	---	------

3.电性能 Electrical Performance

测试项目 Test Item	测试方法 Test Method	检验标准 Criteria
3.1 标准充电 Standard Charging Method	在温度 $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 湿度15~90%RH, 大气压力82kPa~106kPa的环境条件下, 电芯先以恒定电流0.5C充电至3.65V, 再以3.65V的恒定电压充电至电流小于0.05C, 搁置1h。 All tests stated in this Specification are conducted at $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 15~90%RH and atmospheric pressure of 82kPa~106kPa. Charge the cell at a constant current of 0.5C until the voltage reaches 3.65V, then charge it at a constant voltage of 3.65V until the current decreases less than 0.05C and placed for 1h.	
3.2 标准放电 Standard Discharging Method	在温度 $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 湿度15~90%RH, 大气压力82kPa~106kPa的环境条件下, 电芯以恒定电流0.5C放电至2.5V。 All tests stated in this Specification are conducted at $25^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 15~90%RH and atmospheric pressure of 82kPa~106kPa. Discharge the cell at a constant current of 0.5C until the voltage reaches 2.5V.	
3.3 交流内阻 AC Impedance	电芯以0.5C充电30%后在1kHz下测量。 Cell should be measured at 1kHz after Charging the cell 30% at a current of 0.5C.	$\leq 2\text{m}\Omega$
直流内阻 DC Impedance	电芯以0.5C充电30%后, 以2C放电10秒下测量。 Cell should be measured at discharging current of 2C for 10s after Charging the cell 30% at a current of 0.5C.	$\leq 4\text{m}\Omega$
3.4 0.33C容量 0.33C Capacity	电芯以0.5C充满电后, 以0.33C恒流放电至2.5V结束。 Cell should be charged fully at a current of 0.5C and discharged at a constant current of 0.33C until the voltage reaches 2.5V.	$\geq 30\text{Ah}$
1C容量 1C Capacity	电芯以0.5C充满电后, 以1C恒流放电至2.5V结束。 Cell should be charged fully at a current of 0.5C and discharged at a constant current of 1C until the voltage reaches 2.5V.	$\geq 29.5\text{Ah}$

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	8/14
		生效日期	2025 年 8 月 10 日



3.5 循环寿命 Cycling Life	在25°C±2°C, 电芯按0.5C CC/CV充电到3.65V, 截止电流0.05C; 搁置30min, 然后以0.5C恒流放电至2.5V结束, 搁置30min, 再进行下一次循环, 连续4000次。 At 25°C±2°C, Cell should be charged at CC/CV mode (CC:0.5C, CV: 3.65V, Charge Cut-off current: 0.05C) . After stored for 30min, cell should be discharged at CC mode (0.5C, Discharge Cut-off Voltage: 2.5V).After stored for 30min, tests should be continued for 4000 times.	容量保持率≥80% Capacity retention≥80%
	在25°C±2°C, 电芯按0.5C CC/CV充电到3.65V, 截止电流0.05C; 搁置30min, 然后以1C恒流放电至2.5V结束, 搁置30min, 再进行下一次循环, 连续2000次。 At 25°C±2°C, Cell should be charged at CC/CV mode (CC:0.5C, CV: 3.65V, Charge Cut-off current: 0.05C) . After stored for 30min, cell should be discharged at CC mode (1C, Discharge Cut-off Voltage: 2.5V).After stored for 30min, tests should be continued for 2000 times.	容量保持率≥80% Capacity retention≥80%
	在45°C±2°C, 电芯按0.5C CC/CV充电到3.65V, 截止电流0.05C; 搁置30min, 然后以0.5C恒流放电至2.5V结束, 搁置30min, 再进行下一次循环, 连续1500次。 At 45°C±2°C, Cell should be charged at CC/CV mode (CC:0.5C, CV: 3.65V, Charge Cut-off current: 0.05C) . After stored for 30min, cell should be discharged at CC mode (0.5C, Discharge Cut-off Voltage: 2.5V).After stored for 30min, tests should be continued for 1500 times.	容量保持率≥70% Capacity retention≥70%
3.6 不同温度放电性能 Discharge Performance at Different Temperature	室温下, 电芯以0.5C充满电后, 再以1C电流放电至截止电压, 作为标定容量。在-20/-10/0±2°C下储存24h, 以1C电流放电至1.8V为止, 在25/45/60±2°C下储存6h, 以1C电流放电至2.5V为止, 记录放电容量, 用放电容量除以标定容量计算。 Cell should be charged fully at a current of 0.5C and discharged cell at a constant current of 1C to cut-off voltage. Cells should be stored for 24 hours at -20/-10/0±2°C prior to discharging (1.8V), and cells should be stored for 6 hours at 25/45/60±2°C prior to discharging (2.5V).The percentage should be calculated using discharge capacity compared to the nominal capacity.	-20°C≥70% -10°C≥80% 0°C≥85% 25°C≥100% 45°C≥95% 60°C≥95%
3.7 常温存储 Room Temperature Storage Test	电芯以0.5C充满电后, 在25°C±2°C下搁置28天, 再以1C电流放电至终止电压。 Cell should be charged fully at a current of 0.5C, then stored at 25°C±2°C for 28 days. Finally discharged cell at a constant current of 1C to ending voltage.	容量保持率≥95% Capacity retention≥95% 容量恢复率≥97% Capacity recovery≥97%

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	9/14 10
		生效日期	2025年8月10日

3.8 高温存储 High Temperature Storage Test	电芯以0.5C充满电后，在45°C±2°C下搁置28天后，室温搁置5h，再以1C电流放电至终止电压。 Cell should be charged fully at a current of 0.5C, then stored at 45°C±2°C for 28 days. After standing for 5h, discharged cell at a constant current of 1C to ending voltage.	容量保持率≥90% Capacity retention≥90% 容量恢复率≥92% Capacity recovery≥92%
	电芯以0.5C充满电后，在55°C±2°C下搁置7天后，室温搁置5h，再以1C电流放电至终止电压。 Cell should be charged fully at a current of 0.5C, then stored at 55°C±2°C for 7 days. After standing for 5h, discharged cell at a constant current of 1C to ending voltage.	容量保持率≥93% Capacity retention≥93% 容量恢复率≥94% Capacity recovery≥94%

4.安全特性 Safety Characteristics

测试项目 Test Item	测试方法 Test Method	检验标准 Criteria
4.1 过充电 Over-charge Test	电芯以1C充满电后，以1C电流充电至5.5V或充电达1h后停止充电，观察1h。 Cell should be charged fully at a current of 1C, then charged at a constant current of 1C to ending voltage of 5.5V or charged at a constant current of 1C for 1h. Check it for 1h.	电芯不爆炸、不起火 No explosion, no fire.
4.2 过放电 Over-discharge Test	电芯以1C充满电后，以1C电流放电90min，观察1h。 Cell should be charged fully at a current of 1C, then discharged at a constant current of 1C for 90min. Check it for 1h.	电芯不爆炸、不起火、不漏液 No explosion, no fire, no leakage.
4.3 外短路 External Short Circuit Test	电芯以1C充满电后，将正、负极经外部短路10min，外部线路电阻应小于5mΩ；静置1h。 Cell should be charged fully at a current of 1C, then short-circuited by connecting the positive and negative terminals with a resistance	电芯不爆炸、不起火 No explosion, no fire.
4.4 跌落测试 Drop Test	电芯以1C充满电后，正负端子向下从1.5m高度自由跌落到水泥地面上，观察1h。 Cell should be charged fully at a current of 1C, then dropped from a height of 1.5m onto the concrete ground. Positive and negative terminals of cells shall be towards the ground. Check it for 1h.	电芯不爆炸、不起火 No explosion, no fire.

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
		页 次	10/14
		生效日期	2025 年 8 月 10 日
文件名称	保力新 LFP46150-30Ah 圆柱 磷酸铁锂电芯规格书		

4.5 挤压测试 Crush Test	电芯以1C充满电后，以半径为75mm半圆柱体垂直电芯极板方向，以2mm/s速度挤压，当电压为0V或变形量达到15%或挤压力达到100kN后停止挤压，观察1h。 Cell should be charged fully at a current of 1C, then crush the cell perpendicularly to the cell plate at a rate of 2 mm/s with a semi-cylinder (radius of 75mm). When met any of the following criteria, stopping crushing and check it for 1h: Voltage reaches 0V; Deformation reaches 15%; Pressure reaches 100kN.	电芯不爆炸、不起火 No explosion, no fire.
4.6 热冲击测试 (130 °C) Heating Test	电芯以1C充满电后，放置入温度箱，以5°C/min的速率由室温升至130°C±2°C，并保持30min后停止加热，观察1h。 Cell should be charged fully at a current of 1C, then heated in an oven. Temperature will rise to 130°C±2°C at a rate of 5°C/min and remain for 30min. Check it for 1h.	电芯不起火，不爆炸。 No explosion, no fire.
4.7 低气压测试 Low-pressure Test	电芯以1C充满电后，放入低气压箱中，调节气压为11.6kPa，温度为室温，静置6h后，观察1h。 Cell should be charged fully at a current of 1C, then stored it for 6h at an absolute pressure of 11.6kPa (RT). Check it for 1h.	电芯不爆炸、不起火、不漏液 No explosion, no fire, no leakage.
4.8 振动测试 Vibration Test	电芯以1C充满电后，将电芯紧固到振动试验台上，沿X, Y, Z三个方向各振动90±5min，振幅0.76mm，振动频率为10Hz~55Hz；振动速率为1Hz/min；测试结束后搁置1h，目检电芯外观和测试前后的重量变化。 Cell should be charged fully at a current of 1C, then cell is to be subjected to simple harmonic motion with amplitude of 0.76mm total maximum excursion. The frequency is to be varied at the rate of 1Hz per minute between 10 and 55 Hz. The cell should be vibrated for 90±5 minutes per axis of XYZ axes. The samples should be observed for 1 hours after the test, and also check the weight loss of cells before and after the test.	电芯不爆炸、不起火 No explosion, no fire.
4.9 针刺测试 Acupuncture Test	电芯以1C充满电后，用φ5mm~φ8mm的耐高温钢针，以(25±5)mm/s的速度，从垂直于蓄电池极板的方向贯穿，贯穿位置宜靠近所刺面的几何中心，钢针停留在蓄电池中，观察1h。 Cell should be charged fully at a current of 1C, then acupuncture the cell perpendicularly to the cell plate at a rate of (25±5)mm/s with a φ5mm~φ8mm steel needle and remain it inside. The acupuncture location shall be near the geometric center of plane. Check it for 1h.	电芯不爆炸、不起火 No explosion, no fire.

5.出货与储存 Transportation and Storage

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	11/14
		生效日期	2025 年 8 月 10 日

5.1 出货 Shipment

单体电芯按5%~30%SOC或客户要求出货，电芯出货后充电前的剩余容量取决于储存时间和条件。

The cell should be shipped in 5%~30% SOC or in accordance with customers' requirement. The remaining capacity of the cell after shipment and before charging depends on the storage time and conditions.

5.2 储存 Storage

电芯需在0°C-45°C、湿度不大于95%的干燥、清洁、通风的环境下存储。

Cell should be kept at 0°C-45°C, not more than 95% humidity in warehouse where it's dry, clean and well-ventilated.

如果要长时间贮存，电池应在温度范围0°C~25°C、相对湿度在0%~75%和无腐蚀性气体环境中储存。超过半年时，应对电池进行一次完全充放电循环，再将电池充电约3.0-3.2V的条件下储存。

If the battery is stored for a long time, the battery should be conducted a cycle of charge and discharge, and the voltage should be about 3.0-3.2V and the battery is to be stored at temperature range of 0°C~25°C and RH0%~75%, low moisture and corrosive gases environment.

6.操作说明 Operation Instruction

6.1 充电 Charging

电池充电温度范围为0~55°C，建议以0.5C的电流充电至3.65V，超过1C的电流建议不要使用。

The charging temperature range for the batteries is 0~55°C. It is recommended to charge the batteries at a constant of 0.5C until reaching 3.65V. It is not advised to use currents exceeding 1C.

6.2 温度梯度充电方案 Temperature Gradient Charging Scheme

	SOC	温度梯度temperature gradient						
		0~5°C	5~10°C	10~15°C	15~25°C	25~45°C	45~50°C	50~55°C
充电电流 Charging current	100%	0.05C	0.05C	0.05C	0.05C	0.05C	0.05C	0.05C
	98%	0.1C	0.1C	0.1C	0.1C	0.1C	0.1C	0.1C
	90%	0.1C	0.1C	0.4C	0.5C	0.5C	0.5C	0.2C
	80%	0.2C	0.2C	0.4C	0.5C	0.8C	0.5C	0.2C
	70%	0.2C	0.2C	0.6C	0.8C	1.0C	0.5C	0.2C
	60%	0.2C	0.4C	0.6C	0.8C	1.0C	0.5C	0.2C
	50%	0.2C	0.4C	0.8C	0.8C	1.0C	0.5C	0.2C
	40%	0.2C	0.5C	0.8C	0.8C	1.0C	0.5C	0.2C
	30%	0.2C	0.5C	0.8C	0.8C	1.0C	0.5C	0.2C
	20%	0.2C	0.5C	0.8C	0.8C	1.0C	0.5C	0.2C
	10%	0.2C	0.5C	0.8C	0.8C	1.0C	0.5C	0.2C
	0%	0.2C	0.5C	0.8C	0.8C	1.0C	0.5C	0.2C

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	12/14
		生效日期	2025 年 8 月 10 日

6.3 放电 Discharging

建议温度在0℃以上的放电截止电压为2.5V，0℃及以下的放电截止电压为1.8V，超过3C的电流建议不要使用。为了达到较好的性能，电池放电温度范围为-20~60℃。

For discharging, it is recommended to terminate above 0℃ with a cut-off voltage of 2.5V and below 0℃ with a cut-off voltage of 1.8V. It is not advised to use currents exceeding 3C. To achieve optimal performance, the battery’s discharging temperature range is -20~60℃.

6.4 温度梯度放电方案 Temperature Gradient Charging Scheme

	SOC	温度梯度temperature gradient							
		-20~-10℃	-10~0℃	0~10℃	10~20℃	20~45℃	45~50℃	50~55℃	55~60℃
放电电流 Discharging current	100%	0.5C	0.8C	1.5C	1.5C	1.5C	0.8C	0.5C	0.2C
	98%	0.5C	0.8C	1.5C	1.5C	1.5C	0.8C	0.5C	0.2C
	90%	0.5C	0.8C	1.5C	1.5C	1.5C	0.8C	0.5C	0.2C
	80%	0.5C	0.8C	1.5C	1.5C	1.5C	0.8C	0.5C	0.2C
	70%	0.5C	0.8C	1.5C	1.5C	1.5C	0.8C	0.5C	0.2C
	60%	0.5C	0.8C	1.5C	1.5C	1.5C	0.8C	0.5C	0.2C
	50%	0.5C	0.8C	1.2C	1.2C	1.5C	0.8C	0.5C	0.2C
	40%	0.5C	0.6C	1.0C	1.0C	1.5C	0.8C	0.5C	0.2C
	30%	0.4C	0.6C	0.8C	1.0C	1.5C	0.8C	0.5C	0.2C
	20%	0.25C	0.5C	0.8C	0.8C	1.2C	0.8C	0.5C	0.2C
	10%	0.25C	0.5C	0.5C	0.5C	1.0C	0.5C	0.5C	0.1C
	0%	0.1C	0.5C	0.5C	0.5C	0.5C	0.5C	0.5CC	0.1C

7.安全守则 Precautions and Safety Instructions

为避免电芯泄露，过热和爆炸，请注意以下事项：

In order to prevent the battery leakage, getting hot and explosion, please pay attention to preventing measures as following:

Warning!

- 请勿将电池投入水中。非使用时，电池需在干燥阴凉处存放。
Never throw the battery into water. Store it under dry, shady circumstance when not use.
- 请勿颠倒正负极使用。
Never misidentify the positive and negative terminals.
- 请勿直接用金属接通正负极，避免短路。
Never connect the positive and negative terminals of battery with metal to prevent short-circuiting.
- 请勿将电池与金属一起储存或运输。
Never ship or store the battery together with metal.

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱磷酸铁锂电芯规格书	页 次	13/14 7025-08-10
		生效日期	2025 年 8 月 10 日

- 请勿敲击、投掷或踩踏电池。
Never knock, throw or trample the battery.
- 请勿用钉子或其它利器破坏电池。
Never cut through the battery with nail or other edge tool.

Tips!

- 请勿在过高的温度下使用或储存电池，否则会引起电池过热，致使寿命减短和性能降低，甚至起火。长时间储存的温度范围建议是0~25°C。
Never use or store the battery under the over-high temperature. Otherwise it will lead to battery over-heating, which might lose some function and reduce life, even getting fire. The proposed temperature for long-term storage is 0~25°C.
- 请勿将电池投入火中或其它热源中，避免起火、爆炸和环境污染。废电池需回收至供应商处，移交回收站处理。
Never throw the battery into fire or heating machine to avoid fire, explosion and environment pollution; scrap battery should be returned to the supplier and handled by the recycle station.
- 请勿将电池置于强静电场或强磁场中，否则会破坏保护设备。
Never use the battery under strong static electronic and magnetic field, otherwise it will destroy the protecting device.
- 若电解液泄露并进入眼睛，请勿揉捏，经水洗后尽快就医。
Never knead eyes if leakage electrolyte gets into eyes. Wash eyes by water and seek medical advice ASAP.
- 若电池在使用、储存、充电过程中发出异味，过热，形变或其他非常规情况，请停止使用并移除设备。
If battery emit peculiar smell, over-heating, distortion or appear any unconventionality during using, storage or charging process, please stop using and take it out of the device.
- 请勿在充电中直接插拔电池，并使用规定充电设备进行充电。
Never cut the battery in socket directly, please use the stated charger when charging.
- 使用前请检查电池电压和相关连接器；若有异常请勿使用。
Check the voltage of battery and relevant connectors before using. Do not use until everything turns out to be normal.
- 在充电前请检查相关设备绝缘性、物理状态和老化情况。电池电压需高于截止电压，如有异常，需标记并勿更改现状，然后通知我们售后服务部门，待我们工作人员到场维修。
Prior to charging, fully check the insulativity, physical condition and ageing status. The pack voltage must not be less than the cut-off voltage, if not, it needs to be labeled. The user should contact our Customer Service Department. It can't be charged until repaired by our staff.
- 电池需在5%~30%SOC下储存，若半年未使用，需重新充电。
The battery should be stored in 5%~30%SOC. It needs to be charged once again if out of use for as long as half a year.
- 若电极端子污染，需用干净、干燥的棉布擦拭，否则会导致接触和操作不良。
Clean the dirty electrode with a clean dry cloth if any contamination appears, otherwise poor contact or operation failure may occur.

8.技术咨询 Consultation

		文件编号	BLX.NMDC-3JS-46150-GGS-001
		版 次	A0
文件名称	保力新 LFP46150-30Ah 圆柱 磷酸铁锂电芯规格书	页 次	14/14
		生效日期	2025 年 8 月 10 日

如有疑问，请按以下方式咨询：

As to obscurity, contact us as followings:

保力新能源科技股份有限公司

Blivex New Energy Technology CO., LTD.

地址：广东省深圳市南山区兴海大道3040号前海世茂大厦4602室；

Address: Room 4602, Qianhai Shimao building, No. 3040 Xinghai Avenue, Nanshan District,
Shenzhen, Guangdong Province;

电话Tel: 4000665799/0755-86069330。

