



路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

## 锂离子电芯规格书

Specification

for

Lithium-ion Rechargeable Cell

电芯型号: INR18650-2600A

Cell Type: INR18650-2600A

|                               |               |                        |            |
|-------------------------------|---------------|------------------------|------------|
| 文件编号<br>Document No           | PS-LPE-001    | 生效日期<br>Effective date | 2018-04-11 |
| 版次<br>Edition                 | A04           | 页数<br>Pages            | 11         |
| 批准<br>Approved                | 审核<br>Checked | 编制<br>Designed         |            |
| 吴超峰                           | 任峰            | 左建虎                    |            |
| 客户确认<br>Customer confirmation |               |                        |            |



## Contents 目录

- 1. Preface 前言
- 2. Description 说明
- 3. Specification 标准
- 4. Dimensions of INR18650-2600mAh 电芯尺寸INR18650-2600mAh
- 6. Test Conditions 测试条件
  - 6.1 Standard Test Conditions 标准测试条件
  - 6.2 Standard Charge Method 标准充电制式
  - 6.3 Quick Charge Method 快速充电制式
- 7. Electrical Characteristics 电性能
- 8. Environment Characteristic 环境性能
- 9. Safety Test 安全测试
- 10. Shipment 出货
- 11. Warranty 质量保证
- 12. Precautions and Safety Instructions 安全守则
  - 12.1 Standard cell Precaution 电芯防范措施
  - 12.2 Cell Operation Instruction 电芯使用说明
    - 12.2.1 Charging 充电
    - 12.2.2 Discharging 放电
    - 12.2.3 Storage Recommendation 储存条件
- 13. Consultation 技术咨询
- 14. Requirement for Safety Assurance 安全保证要求



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

## 1. Preface 前言

This Product Specification describes the technique requirements, test procedure and precaution notes of prismatic type Lithium-ion Rechargeable cell to be supplied to customer by Roof Energy Technology (BAOSHAN) CO., LTD

本标准规定了由路华能源科技（保山）有限公司生产的锂离子电芯的技术要求，测试方法及注意事项。

## 2. Description 说明

2.1 Product 产品: Lithium-ion Rechargeable cell 锂离子可充性电芯

2.2 Model (Type) 电芯型号: INR18650-2600A

## 3. Specification 标准

| Item 项目                                                          | Specification 标准               | Remark 备注                            |
|------------------------------------------------------------------|--------------------------------|--------------------------------------|
| 3.1 Capacity<br>容量                                               | 标称容量: 2600mAh<br>最低容量: 2550mAh | 0.2C <sub>5</sub> rate, 3.0V cut-off |
| 3.2 Internal Impedance<br>内阻                                     | ≤60mΩ                          | AC (含PTC)                            |
| 3.3 Nominal Voltage<br>额定电压                                      | 3.7V                           | From 4.20V to 3.00V                  |
| 3.4 Charging Current (Std.)<br>充电电流(标准)                          | 0.2C <sub>5</sub>              | 520mA 0~ 45°C                        |
| 3.5 Discharge Current (Std.)<br>放电电流(标准)                         | 0.2C <sub>5</sub>              | 520mA -10~ 60°C                      |
| 3.6 Charging Current (Std.)<br>充电电流(最大)                          | 0.5C <sub>5</sub>              | 1300mA 0~ 45°C                       |
| 3.7 Discharge Current (Std.)<br>放电电流(最大)                         | 1.0C <sub>5</sub>              | 2600mA -10~ 60°C                     |
| 3.8 Maximum Instantaneous Discharge Current (Std.)<br>瞬间放电电流(最大) | 2.0C <sub>5</sub>              | 5200mA -10~ 60°C                     |
| 3.9 Charging Voltage<br>充电电压                                     | 4.20±0.05V                     |                                      |
| 4.0 End-of-charge Current<br>充电终止电流                              | 0.02C <sub>5</sub>             | 52 mA At CV mode                     |

This spec manual is the enterprise standard of ROOFER, without authorization, any pirate or circulation is prohibited. 4/25/2018  
该规格书为路华公司企业标准,未经授权,不可翻印,传播.



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD


|                                         |                                           |  |
|-----------------------------------------|-------------------------------------------|--|
| 4.1 Discharge Cut-off Voltage<br>放电终止电压 | 3.0 V                                     |  |
| 4.2 Operating Temperature<br>工作温度       | Charge: 0 to 45℃<br>Discharge: -10 to 60℃ |  |
| 4.3 weight<br>重量                        | MAX 47.0g                                 |  |
| 4.4 Storage Temperature<br>贮存温度         | 1 month: -5~45℃<br>6 month: 0~45℃         |  |

## 4. Dimensions 尺寸

For details, please refer to annex A.

对于图形结构的详细资讯，请参阅附件A。

## 5. Construction 电芯结构

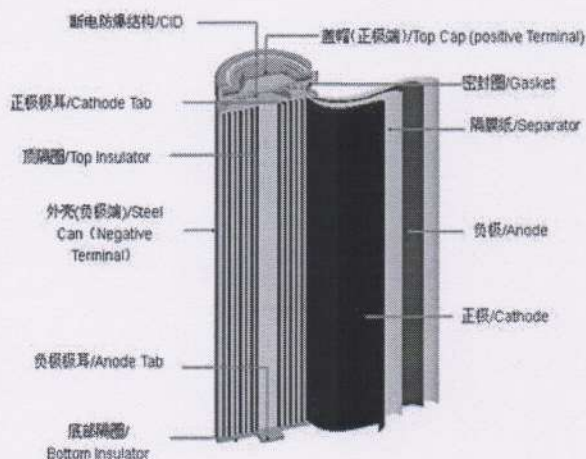

A cell is made of cathode, anode, separator, can and header.

电芯由正极，负极，隔膜，壳体和盖板组成。

## 6. Test Conditions 测试条件

### 6.1 Standard Test Conditions 标准测试条件

Unless otherwise specified, all tests stated in this Product Specification are conducted at temperature  $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$  and humidity  $65\% \pm 20\% \text{ RH}$ .

若无特别要求，此规格书上的产品测试条件均为温度： $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ ，湿度： $65\% \pm 20\% \text{ RH}$ 。

### 6.2 Standard Charge Method 标准充电制式

The "Standard Charge" means charging the Cell at a constant current of  $0.2C_5A$  until the voltage is 4.20V, then charged at a constant voltage of 4.20V until its current is  $0.02C_5A$ .

“标准充电”即在环境温度为 $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 的条件下，先以恒定电流 $0.2C_5A$ 充电至4.20V，再以4.20V的恒压充电至电流为 $0.02C_5A$ 。



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

## 6.3 Quick Charge Method 快速充电制式

The "Quick Charge" means charging the Cell at a constant current of  $0.5C_5A$  until the voltage is 4.20V, then charged at a constant voltage of 4.20V until its current is  $0.02C_5A$ .

“快速充电”即在环境温度为 $23^{\circ}C \pm 2^{\circ}C$ 的条件下，先以恒定电流 $0.5C_5A$ 充电至4.20V，再以4.20V的恒压充电至电流为 $0.02C_5A$ 。

## 7. Electrical Characteristics 电性能

| Test Item<br>测试项目                                               | Test Method<br>测试方法                                                                                                                                                                                                                                                                                                                                                                                                       | Criteria<br>检验标准                                                |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| 7.1 Discharge<br>Performance<br>( $0.2C_5A$ )<br>$0.2C_5A$ 放电性能 | A cell is charged in accordance with 6.2, and then stored in an ambient temperature of $23^{\circ}C \pm 2^{\circ}C$ for 0.5h~1h, finally discharged to cut-off voltage at a constant current of $0.2C_5A$ .<br>电芯按6.2规定充电后，在环境温度为 $23^{\circ}C \pm 2^{\circ}C$ 的条件下搁置0.5h~1h，而后以 $0.2C_5A$ 电流放电到终止电压。                                                                                                                     | the discharging time is not less than 294min.<br>放电时间不低于294min. |
| 7.2 High<br>Temperature<br>Performance<br>高温性能                  | A cell is charged in accordance with 6.2 and stored in an ambient temperature of $55^{\circ}C \pm 2^{\circ}C$ for 2h, then discharged to cut-off voltage at a constant current of $0.2C_5A$ .<br>电芯按6.2规定充电结束后，将电芯放入 $55^{\circ}C \pm 2^{\circ}C$ 的高温箱中恒温2h，然后以 $0.2C_5A$ 电流放电至终止电压。                                                                                                                                      | 1. the discharging time is not less than 5h;<br>1、放电时间不低于5h;    |
| 7.3 Low<br>Temperature<br>Performance<br>低温性能                   | A cell is charged in accordance with 6.2, and stored in an ambient temperature of $-10^{\circ}C \pm 2^{\circ}C$ for 4h, then discharged to cut-off voltage at a constant current of $0.2C_5A$ .<br>电芯按6.2规定充电结束后，将电芯放入 $-10^{\circ}C \pm 2^{\circ}C$ 的低温箱中恒温4h，然后以 $0.2C_5A$ 电流放电至终止电压。                                                                                                                                   | 1. the discharging time is not less than 3h;<br>1、放电时间不低于3h;    |
| 7.4 Charge (Capacity)<br>Retention<br>荷电保持能力                    | A cell is charged in accordance with 6.2, and stored in an ambient temperature of $23^{\circ}C \pm 2^{\circ}C$ for 28d, then discharged to cut-off voltage at a constant current of $0.2C_5A$ .<br>电芯按6.2规定充电结束后，在环境温度为 $23^{\circ}C \pm 2^{\circ}C$ 条件下，将电芯搁置28天，再以 $0.2C_5A$ 电流放电至终止电压；                                                                                                                                 | Retention: $85\% C_5Ah$<br>容量保持率: $85\% C_5Ah$ ;                |
| 7.5 Cycle Life<br>循环寿命                                          | at temperature $23^{\circ}C \pm 2^{\circ}C$ , the Cell at a constant current of $0.5C_5A$ until the voltage is 4.20V, and stored for 10min, then discharged to cut-off voltage, after that, stored 10min prior to next charge-discharge cycle. The cell shall be continuously charged and discharged for 300 times.<br>在环境温度为 $23^{\circ}C \pm 2^{\circ}C$ 条件下，电芯 $0.5C_5A$ 充电至4.2V，而后搁置10min，然后以 $0.5C_5A$ 电流放电至终止电压，放电结 | capacity retention $\geq 80\%$<br>容量保持率 $\geq 80\%$             |

This spec manual is the enterprise standard of ROOFER, without authorization, any pirate or circulation is prohibited. 4/11/2018  
该规格书为路华公司企业标准, 未经授权, 不可翻印, 传播。



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

|  |                                          |  |
|--|------------------------------------------|--|
|  | 束后, 搁置10min, 再进行下一次充放电循环, 连续进行充放电循环300次。 |  |
|--|------------------------------------------|--|

## 8. Environment Characteristic 环境性能

| Test Item<br>测试项目             | Test Method<br>测试方法                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Criteria<br>检验标准                                                                                                                                                             |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 8.1 Vibration<br>Test<br>振动测试 | <p>A cell is charged in accordance with 6.2, then installed onto the vibration desk with clamps. Equipment parameters of leakage frequency and amplitude are as follows (the frequency is to be varied at the rate of 1oct/min between 10 and 55 herts, and repeat vibration for 30min. The cell is to be tested in three mutually perpendicular directions):</p> <p>frequency: 10Hz~30Hz amplitude: 0.38mm<br/>frequency: 30Hz~55Hz amplitude: 0.19mm</p> <p>电芯按6.2的规定充电结束后, 将电芯用夹具安装在振动台的台面上, 按下面的振动频率和对应的振幅调整好实验设备. X、Y、Z三个方向每个方向上从10~55Hz循环扫频振动30min, 扫频速率为1oct/min;</p> <p>振动频率: 10Hz~30Hz 位移幅值(单振幅): 0.38mm;<br/>振动频率: 30Hz~55Hz 位移幅值(单振幅): 0.19mm;</p> | <p>1. no scratch, no fume, no explosion;<br/>2. The open circuit voltage of no less than 90% of initial voltage;</p> <p>1. 电芯外观应无明显损伤, 漏液, 冒烟或爆炸;<br/>2. 开路电压不低于90%初始电压;</p> |
| 8.2 Drop test<br>自由跌落         | <p>A cell is charged in accordance with 6.2, then dropped from a height of 1000mm to a wooden board (18-20mm thick) which is placed on the concrete ground. Cells shall be dropped in each of three mutually perpendicular directions. Total drop times are 6. After that, the cell is discharged to cut-off voltage at CC of 0.5 C<sub>5</sub>A, then repeat charge &amp; discharge at a current of 0.5 C<sub>5</sub>A, the cycle times should be not less than 3. 电芯按6.2规定充电结束后, 将电芯样品由高度为1000mm的位置自由跌落到置于水泥地面上的18-20mm厚的木板上, 从X、Y、Z正负方向(六个方向)每个方向自由跌落1次, 自由跌落结束后, 将电芯以0.5 C<sub>5</sub>A电流放电至终止电压, 然后以0.5 C<sub>5</sub>A的电流进行充放电循环, 充放电循环次数应不少于3次。</p>     | <p>1. no leakage, no fume, no explosion.<br/>1. 电芯应不漏液, 冒烟或爆炸。<br/>2. The open circuit voltage of no less than 90% of initial voltage;<br/>2. 开路电压不低于90%初始电压;</p>            |

This spec manual is the enterprise standard of ROOFER, without authorization, any pirate or circulation is prohibited. 4/25/2018  
该规格书为路华公司企业标准, 未经授权, 不可翻印, 传播。



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

## 9. Safety Test 安全测试

All below tests are carried out on the equipments with forced ventilation and explosion-proof device. Before test, all cells are charged in accordance with 6.2, and stored 24h prior to testing.

下述试验应在有强制排风条件及防爆措施的装置内进行，在试验前所有的电芯都按6.2规定充电，并搁置24h后，再进行以下试验。

| Test Item<br>测试项目                      | Test Method<br>测试方法                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Criteria<br>检验标准                                                                                                               |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| 9.1 Impact Test<br>重物冲击                | A cell is to be placed on the impact flat. And a $\phi 15.8\text{mm} \pm 2\text{mm}$ steel columns placed in the battery center, A $9.1\text{kg} \pm 0.1\text{kg}$ weight is to be dropped from a height of $610\text{mm} \pm 25\text{mm}$ , Drop onto the steel columns over the center battery, the distortion is allowed.<br>将电芯放在冲击台上，并将一个 $\phi 15.8\text{mm} \pm 2\text{mm}$ 的钢柱置于电池中心，将 $9.1\text{kg} \pm 0.1\text{kg}$ 重锤自 $610\text{mm} \pm 25\text{mm}$ 高度自由落下，掉落到电池中心上方的钢柱上，电芯允许发生变形。 | no fire, no explosion<br>电芯不起火，不爆炸                                                                                             |
| 9.2 Heating Test<br>热冲击                | A cell is to be heated in a circulating air oven. The temperature of the oven is to be raised at a rate of $5^{\circ}\text{C} \pm 2^{\circ}\text{C}$ per minute to a temperature of $130^{\circ}\text{C} \pm 2^{\circ}\text{C}$ and remain for 30min at that temperature before the test is discontinued.<br>将电芯放在电热鼓风干燥箱中，温度以 $5^{\circ}\text{C} \pm 2^{\circ}\text{C}/\text{min}$ 的速率由室温升至 $130^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 并保持 30min。                                              | no fire, no explosion<br>电芯不起火，不爆炸                                                                                             |
| 9.3 overcharge test<br>(3C/10V)<br>过充电 | A cell is to be subjected to CC/CV power by connecting its positive & negative terminal, then set the current as $3C_5A$ , the voltage as 10V, after that, Charge the cell up to 10V at CC of $3C_5A$ and last 2h at the voltage of 10V.<br>将电芯正负极连接于恒压电源，调节电流至 $3C_5A$ ，电压为 10V，然后对电芯以 $3C_5A$ 充电，直到电压为 10V，电流接近 0A，当电芯温度下降到比峰值低约 $10^{\circ}\text{C}$ 时，结束实验。                                                                                                                                  | no fire, no explosion<br>电芯不起火，不爆炸                                                                                             |
| 9.4 Short-circuit test<br>短路测试         | A Cell is to be short-circuited by connecting the positive and negative terminals of the cell with copper wire having a maximum resistance load of $80 \pm 20\text{ m}\Omega$ . Monitor its temperature while testing, the cell is to be discharged until the cell case temperature has returned to be $10^{\circ}\text{C}$ less than peak temperature.<br>将接有热电偶的电芯置于通风橱中，用铜线短路其正负极（线路总电阻 $80 \pm 20\text{ m}\Omega$ ），实验过程中监视电芯温度变                                                             | no fire, no explosion, Cell surface temperature is less than $150^{\circ}\text{C}$<br>电芯不起火，不爆炸，电芯表面温度小于 $150^{\circ}\text{C}$ |

This spec manual is the enterprise standard of ROOFER, without authorization, any pirate or circulation is prohibited. 4/11/2018  
该规格书为路华公司企业标准，未经授权，不可翻印，传播。



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD


化，当电芯温度下降到比峰值低约10℃时，结束实验。

## 10. Shipment 出货

The Cell shall be shipped in voltage range of 3.70 ~ 3.80 V or in accordance with customers' requirement. The remaining capacity before charging shall be changed depending on the storage time and conditions. Attach package flow chart.

单体电芯按3.70~3.80V的充电电压或客户要求出货，电芯出货后充电前的剩余容量取决于储存时间和条件。附出货包装流程图。

| NO. | Item 项目                           | Description 描述                    | Remark 备注 |
|-----|-----------------------------------|-----------------------------------|-----------|
| 1   | Packing style 包装方式                | Carton&Box&Outer Card<br>外箱+纸盒+刀卡 |           |
| 2   | Outside of the box size<br>包装箱外尺寸 | 460mm*245mm*185mm                 |           |
| 3   | Weight 重量                         | ≤19.7Kg                           |           |
| 4   | Carton Sealing style<br>封箱方式      | Scotch tape 透明封箱胶带                |           |

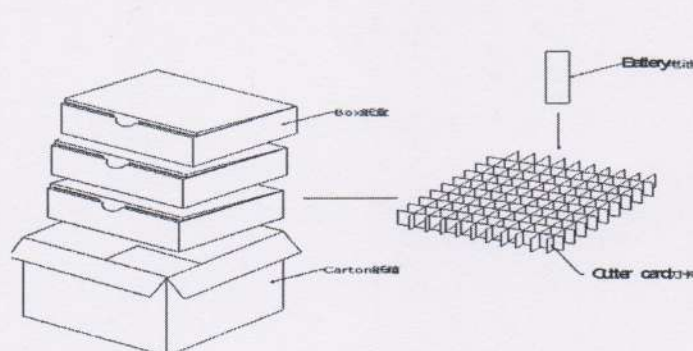

## 11. Warranty 质量保证

The Warranty period of cell is made according to business contract.,However, even though the problem occurs within this period, ROOFER won't replace a new cell for free as long as the problem is not due to the failure of ROOFER manufacturing process or is due to customer's abuse or misuse.

自出货之日起电芯的保质期限依合同而定。但是，在此期限内，如果非路华公司的制程原因而是客户的误用造成的电芯质量问题，路华公司不承诺免费更换。

- > ROOFER will not be responsible for trouble occurred by handling outside of the precautions in instructions.  
路华公司对违反安全守则操作所产生的问题不承担任何责任。
- > ROOFER will not be responsible for trouble occurred by matching electric circuit, cell pack and charger.  
路华公司对与电路，电池组，充电器搭配使用所产生的问题不承担任何责任。
- > ROOFER will be exempt from warrantee any defect cells during assembling after acceptance.  
出货后客户在电芯组装过程中产生的不良电芯不在路华公司质量保证的范围之列。

## 12. Precautions and Safety Instructions 安全守则

Lithium-Ion rechargeable batteries subject to abusive conditions can cause damage to the cell and/or personal injury. Please read and observe the standard cell precautions below before using utilization.

滥用锂离子充电电芯可能会造成电芯的损害或人身的伤害。在使用锂离子充电电芯以前，请仔细阅读以下的安全守则：

Note 1. The customer is required to contact ROOFER in advance, if and when the customer needs other

This spec manual is the enterprise standard of ROOFER, without authorization, any pirate or circulation is prohibited. 4/11/2018  
该规格书为路华公司企业标准，未经授权，不可翻印，传播。



applications or operating conditions than those described in this document.

注释1.如果客户需要将电芯在该文件之外的条件下操作或应用，请先咨询路华公司相关事宜。

Note 2. ROOFER will take no responsibility for any accident when the cell is used under other conditions than those described in this Document.

注释 2.在该文件说明的条件之外使用该电芯而产生的事故,路华公司不承担任何责任。

### 12.1 Standard cell Precaution 电芯防范措施

a. Do not expose the cell to extreme heat or flame.

不要将电芯暴露在极热或有火星的环境中。

b. Do not short circuit, over-charge or over-discharge the cell.

不要将电芯短路，过充或过放。

c. Do not subject the cell to strong mechanical shocks.

不要使电芯承受过重的机械冲击。

d. Do not immerse the cell in water or sea water, or get it wet..

不要将电芯浸入海水或水中，或者使其吸湿。

e. Do not reverse the polarity of the cell for any reason.

不要颠倒电芯的正负极。

f. Do not disassemble or modify the cell.

不要拆卸或修整电芯。

h. Do not handle or store with metallic like necklaces, coins or hairpins, etc.

不要和项链，硬币或发夹等金属物品放置在一起。

i. Do not use the cell with conspicuous damage or deformation.

不要使电芯受到明显的损害或变形。

j. Do not connect cell to the plug socket or car-cigarette-plug.

不要将电芯与插座连接。

k. Do not make the direct soldering onto a cell.

不要直接焊接电芯。

l. Do not touch a leaked cell directly.

不要直接接触泄漏的电芯。

m. Do not use for other equipment.

不要将电芯用于其它设备。

n. Do not use Lithium-ion cell in mixture.

不要将锂离子电芯混合使用。

o. Do not use or leave the cell under the blazing sun (or in heated car by sunshine).

不要将电芯放置在太阳光直射的地方。

p. Keep cell away from children.

将电芯放置在远离儿童的地方。

q. Do not drive a nail into the cell,strike it by hammer or tread it.

不要针刺，锤打或践踏电芯。

r. Do not give cell impact or fling it.

不要撞击或投掷电芯。



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

## 12.2 cell Operation Instruction 电芯使用说明

### 12.2.1. Charging 充电

a. Charge the cell in a temperature range of 0°C to + 45°C.

电芯充电温度范围为0°C~45°C

b. Charge the cell at a constant current of 0.2C until 4.20V is attained. Charge rates greater than 1C are NOT recommended. (C : Rated Capacity of cell)

以0.2C的电流恒流充电至4.20V.超过1C的电流建议不要使用 (C: 标称容量)

\* Use a constant current, constant voltage (CC/CV) lithium-ion (Li+) cell charge controller.

使用恒压恒流锂离子电芯充电器

\* Do not continue to charge cell over specified time.

不要超过标准时间持续充电

### 12.2.2. Discharging 放电

a. Recommended cut-off voltage to 3.0V. Recommended max discharge rate is 1C at constant current.

建议放电终止电压为3.0V, 建议最大恒流放电电流为1C

b. For maximum performance, discharge the cell in a temperature range of -10°C to + 60°C.

为了达到较好的性能, 电芯的放电温度范围为-10°C ~ + 60°C

### 12.2.3. Storage Recommendations 储存建议

#### a. Storage Temperature and Humidity 储存温度和湿度

• Storage the cell at temperature of -5 ~ 45°C, low humidity and no corrosive gas atmosphere.

电芯应储存在温度范围为-5 ~ 45°C, 低湿度和不含腐蚀性气体的环境中。

• No press on the cell

不要让电芯承担任何压力

#### b. Long Period Storage 长期存放

• In case of long period storage (more than 3 months), storage the cell at temperature range of 0 ~ +45°C, low humidity, no corrosive gas atmosphere.

如果要长时间存放(超过3个月), 电芯应存储在温度范围为0~45°C, 低湿度和不含腐蚀性气体的环境中。

• No press on the cell

不要让电芯承受任何压力

## 13. Consultation 技术咨询

As to the obscurity, contact the following.

ROOFER ENERGY TECHNOLOGY(BAOSHAN) CO., LTD

Tel No.: 0875-8889999

Fax No.: 0875-8885555

Address: ROOFER Industrial Park, Baoshan industrial park , longyang City, Yunnan Province, China.

如有疑问, 请按以下方式咨询:

路华能源科技（保山）有限公司

This spec manual is the enterprise standard of ROOFER, without authorization, any pirate or circulation is prohibited. 4/25/2018  
该规格书为路华公司企业标准,未经授权,不可翻印,传播.



# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

电话: 0875-8889999


传真: 0875-8885555

厂址: 云南省保山市隆阳区保山工贸园路华工业园

## 14. Requirement for Safety Assurance 安全保证要求

For the sake of safety assurance, please discuss the equipment design, its system and protection circuit of Lithium-ion cell with Roof in advance. And consult about the high rate current, rapid charge and special application in the same way.

为了安全起见，如有设备设计，锂离子电芯系统保护电路或高电流，快速充电和其它方面的特殊应用，请先咨询路华公司相关事宜。
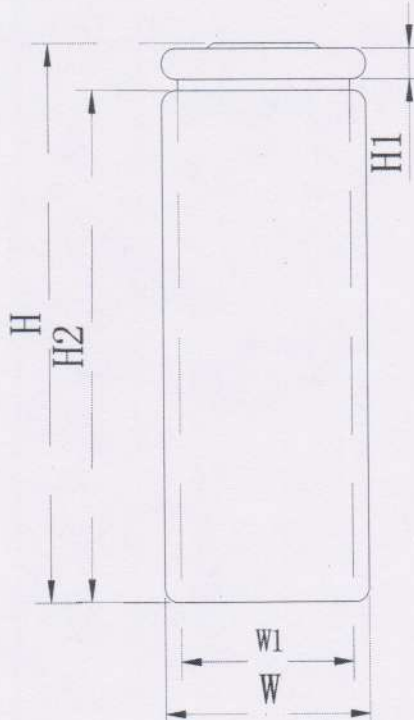
| 标题                                                                                             | INR18650-2600A电芯尺寸图 |             |                                          |
|------------------------------------------------------------------------------------------------|---------------------|-------------|------------------------------------------|
| <div></div> |                     |             |                                          |
| NO                                                                                             | 项目                  | 描述          | 规格                                       |
| 1                                                                                              | H                   | 电芯高度（含热塑套管） | 65.10 <sup>+0.1</sup> <sub>-0.1</sub> mm |

This spec manual is the enterprise standard of ROOFER, without authorization, any pirate or circulation is prohibited. 4/25/2018  
该规格书为路华公司企业标准,未经授权,不可翻印,传播.




# 路华能源科技（保山）有限公司

ROOFER ROOFER ENERGY TECHNOLOGY (BAOSHAN) CO., LTD

|   |    |           |                           |
|---|----|-----------|---------------------------|
| 2 | H1 | 电芯肩高      | $2.50^{+0.05}_{-0.05}$ mm |
| 3 | H2 | 下沿高度      | $61.80^{+0.1}_{-0.1}$ mm  |
| 4 | W1 | 槽内宽       | $14.50^{+0.1}_{-0.1}$ mm  |
| 5 | W  | 直径（含热塑套管） | $\leq 18.50$ mm           |

附：

充放电曲线

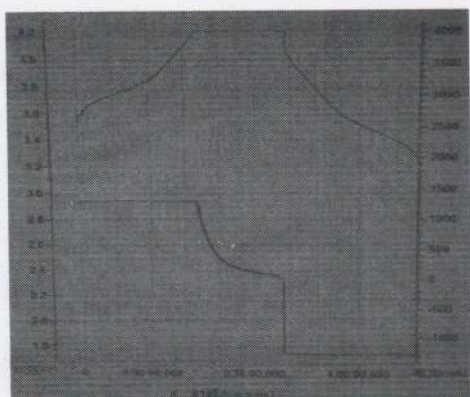

循环特性

